




CLONTARF TO CITY CENTRE PROJECT
SECTION 2_PHASE 1B
TEMPORARY CONCRETE PLINTHS WORKS
SEQUENCE 3

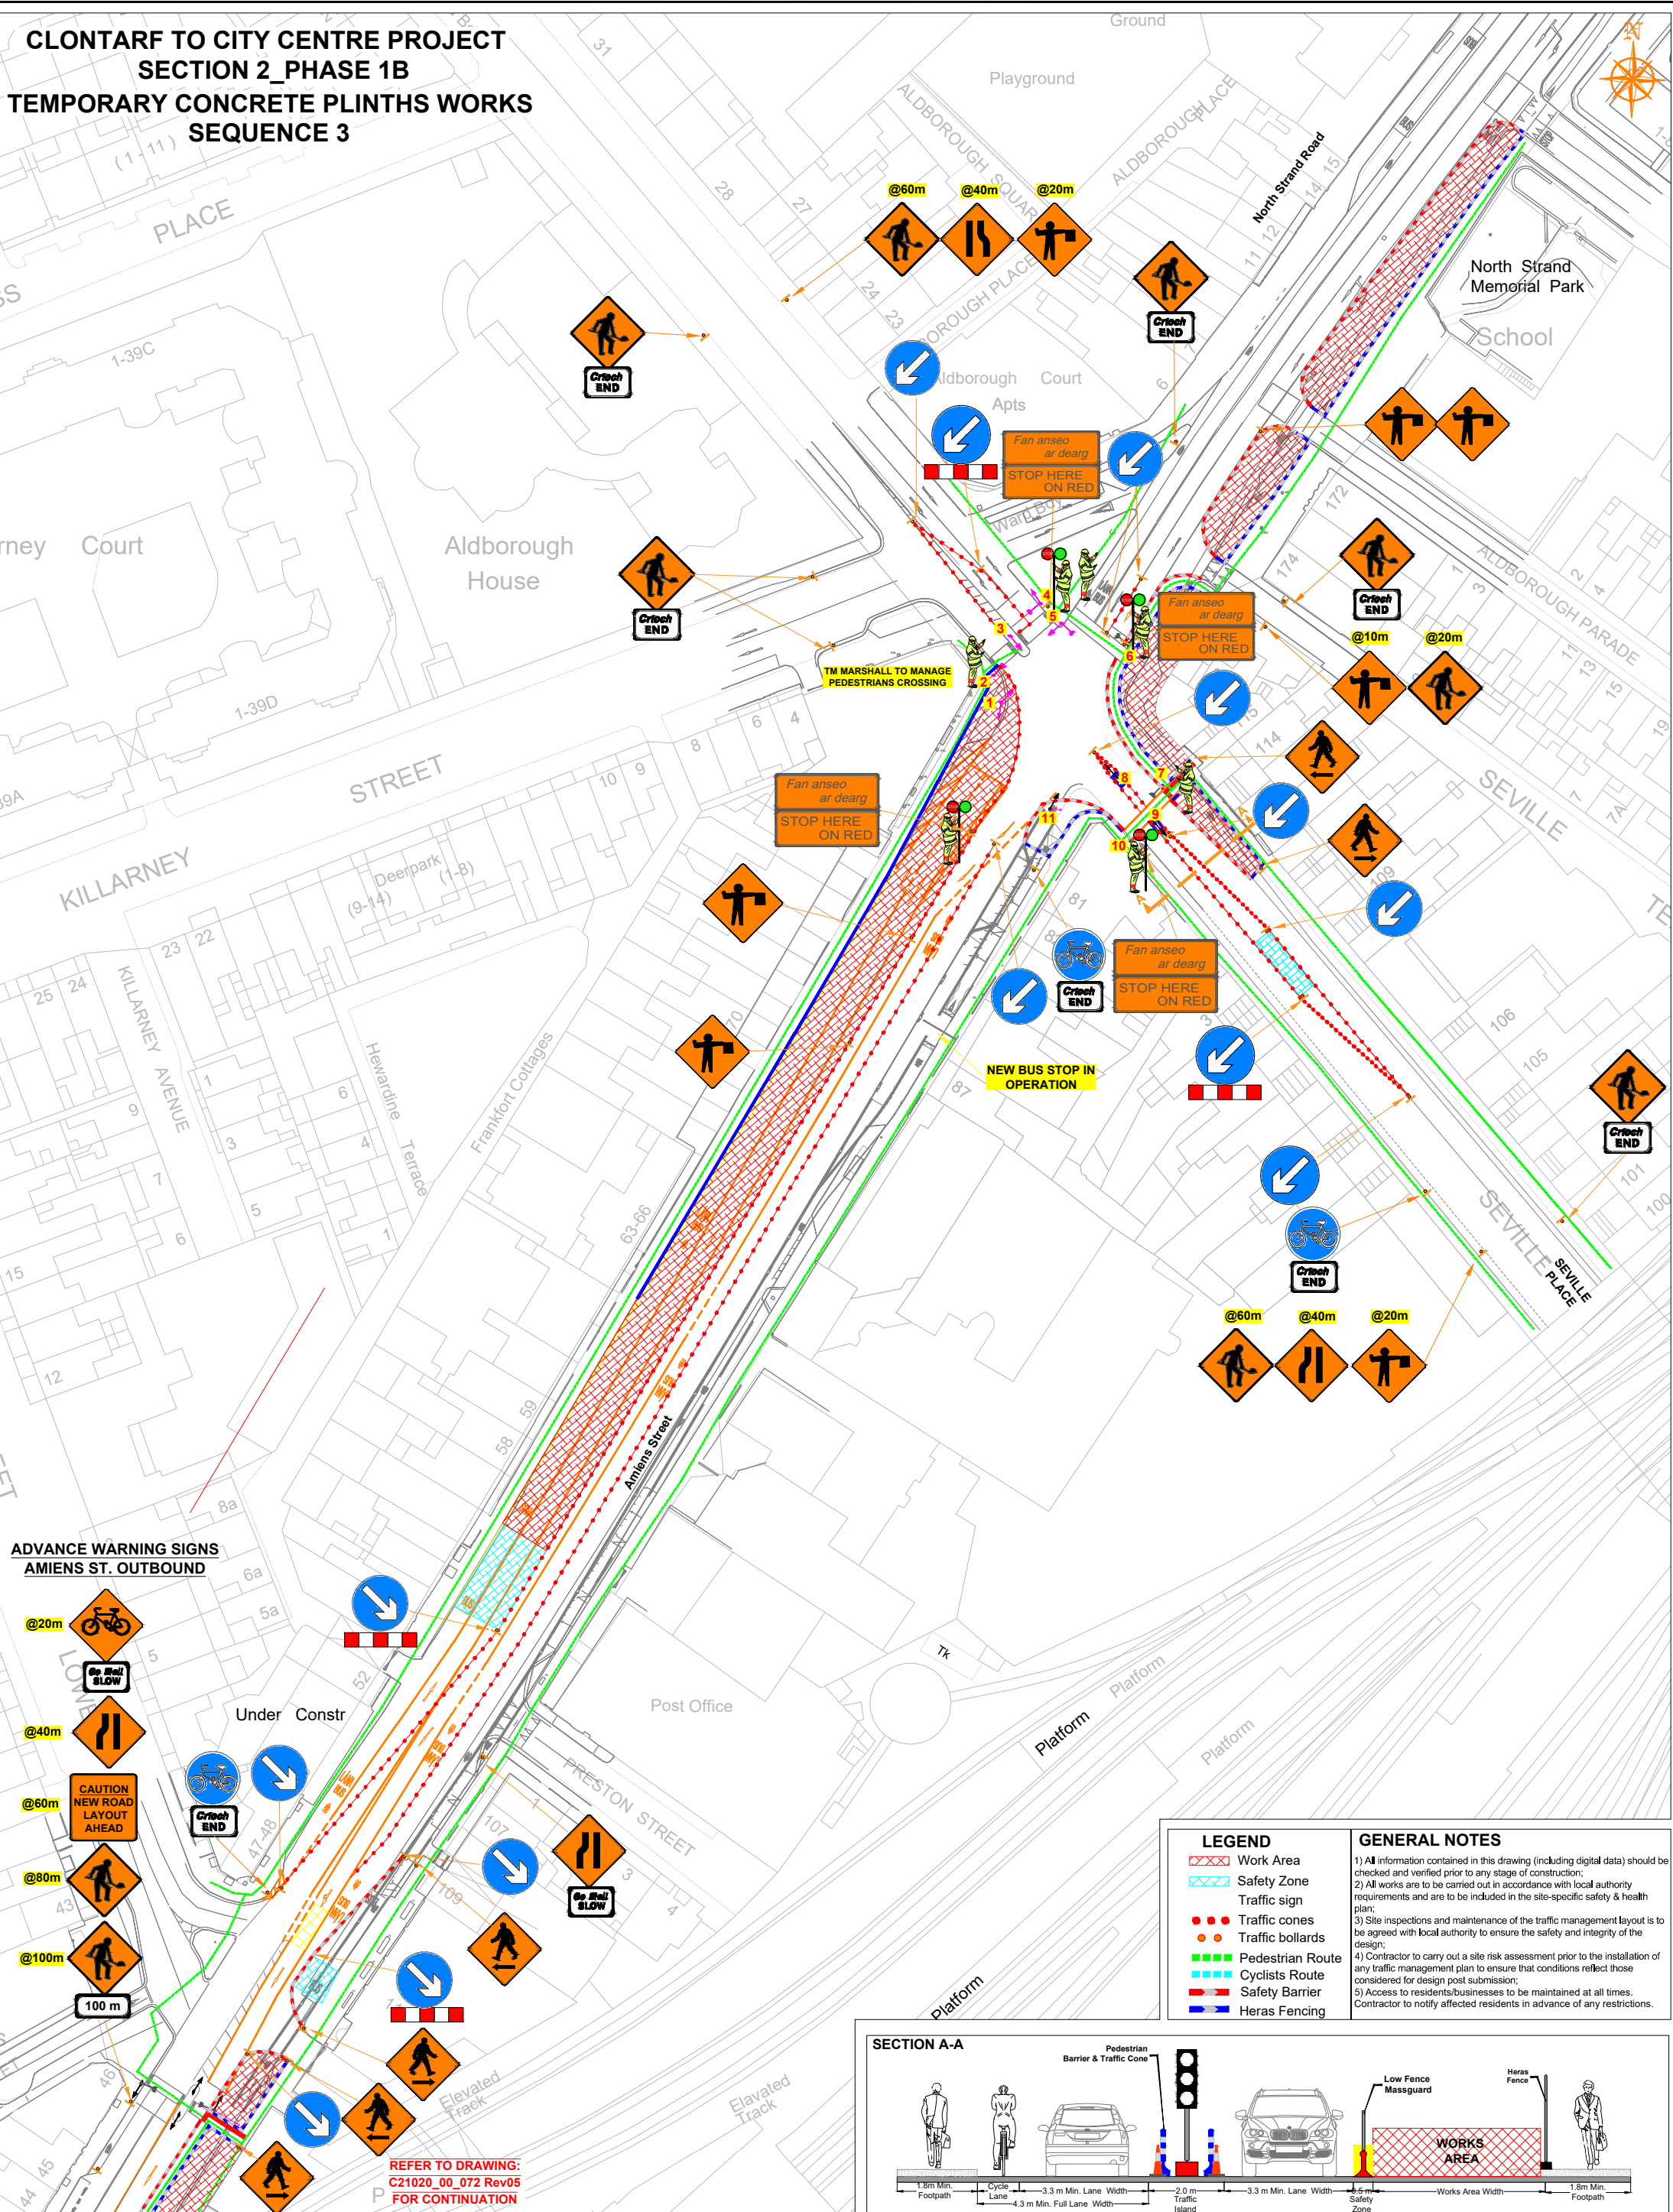

 <p>ROAD CONTROL</p> <p><i>Copyright Notes:</i> This drawing is the property of Road Control Services Ltd. The design information contained herein is strictly confidential. This document is not to be used, reproduced, disclosed or circulated in whole or in part without prior written consent.</p>	 <p>CLONMEL ENTERPRISES BUILDING & CIVIL ENGINEERING</p>	CLIENT	DESIGN PARAMETERS Speed Limit 60 Road Classification 1(iv) Roadworks type A Number of advance signs 3 Sign visibility 60m Distance between signs 20m Taper at lane 1 in 10 / 45° Taper at hard shoulder N/A	Sign size (diamond) 600mm Sign size (circular) 600mm Minimum Cone size 750mm Cone spacing at tapers 3m Cone spacing longitudinal 6m Lateral Safety Zone 0.5m Longitudinal Safety Zone 15m Minimum lane width 3.0m	Rev	Date	Details	Dm	Chk	App	Dm	DS	Project CLONTARF TO CITY CENTRE PROJECT Title TRAFFIC MANAGEMENT PLAN SECTION 2_PHASE 1B SEQUENCE 3	
												Chk		MA
												App		DH
												Date		20/01/2022
												Scale		A1 NTS A3 NTS
												Stage		CONSTRUCTION
												Drawing No		C21020 00 084B