


LEGEND	
	PROPOSED 350mm WIDE LEINSTER GRANITE KERB 350mm WIDE LEINSTER GRANITE KERB TO BE LAID AT A 100mm UPSTAND. (REFER TO DETAIL "C" ON DRAWING 1101.1 FOR DETAILS)
	PROPOSED CONCRETE PROTECTION KERB CONCRETE KERB TO BE CONSTRUCTED WITH A 100mm UPSTAND. WIDTH VARIES, MINIMUM WIDTH 300mm (REFER TO TII CC-SCD-01102 FOR DETAILS)
	PROPOSED 300mm WIDE LEINSTER GRANITE KERB 300mm WIDE LEINSTER GRANITE KERB TO BE LAID FLUSH WITH CARRIAGEWAY. (INCLUDING TRANSITIONS). (REFER TO DETAIL "C" ON DRAWING 1101.1 FOR DETAILS)
	PROPOSED 350mm WIDE LEINSTER GRANITE KERB PROPOSED 350mm WIDE LEINSTER GRANITE KERB TO BE LAID FLUSH WITH CARRIAGEWAY. (INCLUDING TRANSITIONS)
	PROPOSED 300mm WIDE CONCRETE KERB PROPOSED 300mm WIDE CONCRETE KERB TO BE CONSTRUCTED FLUSH WITH CARRIAGEWAY. (INCLUDING TRANSITIONS)
	ANTIQUE GRANITE KERB 150mm WIDE RELOCATED TO SUIT ADJACENT FOOTWAY LEVELS
	EXISTING 150mm WIDE GRANITE KERB EXISTING 150mm WIDE GRANITE KERB TO BE REINSTATED FLUSH WITH CARRIAGEWAY. (INCLUDING TRANSITIONS)
	ANTIQUE GRANITE KERB 150mm WIDE ADJUSTED TO SUIT ADJACENT FOOTWAY LEVELS.
	EXISTING 300mm WIDE GRANITE KERB EXISTING 300mm WIDE GRANITE KERB TO BE REINSTATED TO MATCH EXISTING UPSTAND.
	PROPOSED 300mm WIDE LEINSTER GRANITE KERB 300mm WIDE LEINSTER GRANITE KERB TO BE LAID AT A 100mm UPSTAND. (REFER TO DETAIL "C" ON DRAWING 1101.1 FOR DETAILS)
	ANTIQUE GRANITE KERB 300mm WIDE ADJUSTED TO SUIT ADJACENT FOOTWAY LEVELS.
	EXISTING GRANITE KERB 300mm WIDE RELOCATED TO SUIT ADJACENT FOOTWAY LEVELS
	ANTIQUE GRANITE KERB 450mm WIDE RELOCATED TO SUIT ADJACENT FOOTWAY LEVELS
	ANTIQUE GRANITE KERB 450mm WIDE ADJUSTED TO SUIT ADJACENT FOOTWAY LEVELS.
	ANTIQUE GRANITE KERB 150mm WIDE ADJUSTED TO SUIT 0mm TO 6mm UPSTAND (INCLUDING TRANSITIONS)
	ANTIQUE GRANITE KERB 300mm WIDE RELOCATED WITH A 0mm TO 6mm UPSTAND
	GRANITE KERB 300mm WIDE TO BE ADJUSTED TO SUIT 0mm TO 6mm UPSTAND ABOVE FINISHED ROAD LEVEL (INCLUDING TRANSITIONS)
	GRANITE KERB 450mm WIDE ADJUSTED TO SUIT 0mm TO 6mm UPSTAND (INCLUDING TRANSITIONS)
	PROPOSED 300mm WIDE LEINSTER GRANITE KERB QUADRANT
	TACTILE PAVING PROPOSED 400x400x50mm RED BLISTER TACTILE PAVING CONSTRUCTION AT CONTROLLED CROSSINGS. (AS PER SECTION 5.5 OF DCC CONSTRUCTION STANDARDS)
	TACTILE PAVING PROPOSED 400x400x100mm PINK GRANITE BLISTER TACTILE PAVING CONSTRUCTION AT CONTROLLED CROSSINGS. (REFER TO DETAIL "H" ON DRAWING 1101.2)
	TACTILE PAVING PROPOSED 400x400x100mm BLACK GRANITE BLISTER TACTILE PAVING CONSTRUCTION AT ALL UNCONTROLLED CROSSINGS. (REFER TO DETAIL "H" ON DRAWING 1101.2)
	PROPOSED CYCLE TRACK RAMP
	PROPOSED CONCRETE FOOTWAY CONSTRUCTION (REFER TO TII CC-SCD-01105 - Type 1)
	PROPOSED 600x600x63mm CONCRETE PAVING SLABS (REFER TO DETAIL RM012 OF DCC CONSTRUCTION STANDARDS)
	PROPOSED 600x400x100mm LEINSTER GRANITE FLAGS CONSTRUCTION (REFER TO DETAIL RM006 OF DCC CONSTRUCTION STANDARDS)
	PROPOSED 100x100x100mm LEINSTER GRANITE SETTS CONSTRUCTION (REFER TO DETAIL "D" ON DRAWING 1101.1)
	PROPOSED CYCLE / TRAFFIC ISLAND CONSTRUCTION (REFER TO TII CC-SCD-01110 & CC-SCD-01107)
	PROPOSED ALTERNATING LEINSTER GRANITE FLAGS CONSTRUCTION 500, 400, 300L x 400, 300W x 100mm FLAG FOR PAVING PATTERN REFER TO DETAIL "D" ON DRAWING 1102.1 FOR CONSTRUCTION DETAIL REFER TO DETAIL "A" ON DRAWING 1101.1)
	PROPOSED ALTERNATING LEINSTER GRANITE FLAGS CONSTRUCTION 500, 400, 300L x 400, 300W x 60mm FLAG FOR PAVING PATTERN REFER TO DETAIL "D" ON DRAWING 1102.1 FOR CONSTRUCTION DETAIL REFER TO DETAIL "B" ON DRAWING 1101.1)
	PROPOSED PRE CAST CONCRETE FLAGS CONSTRUCTION
	PROPOSED GREY RESIN BOUND AGGREGATE



PROJECT  
**Fitzwilliam Cycle Route**

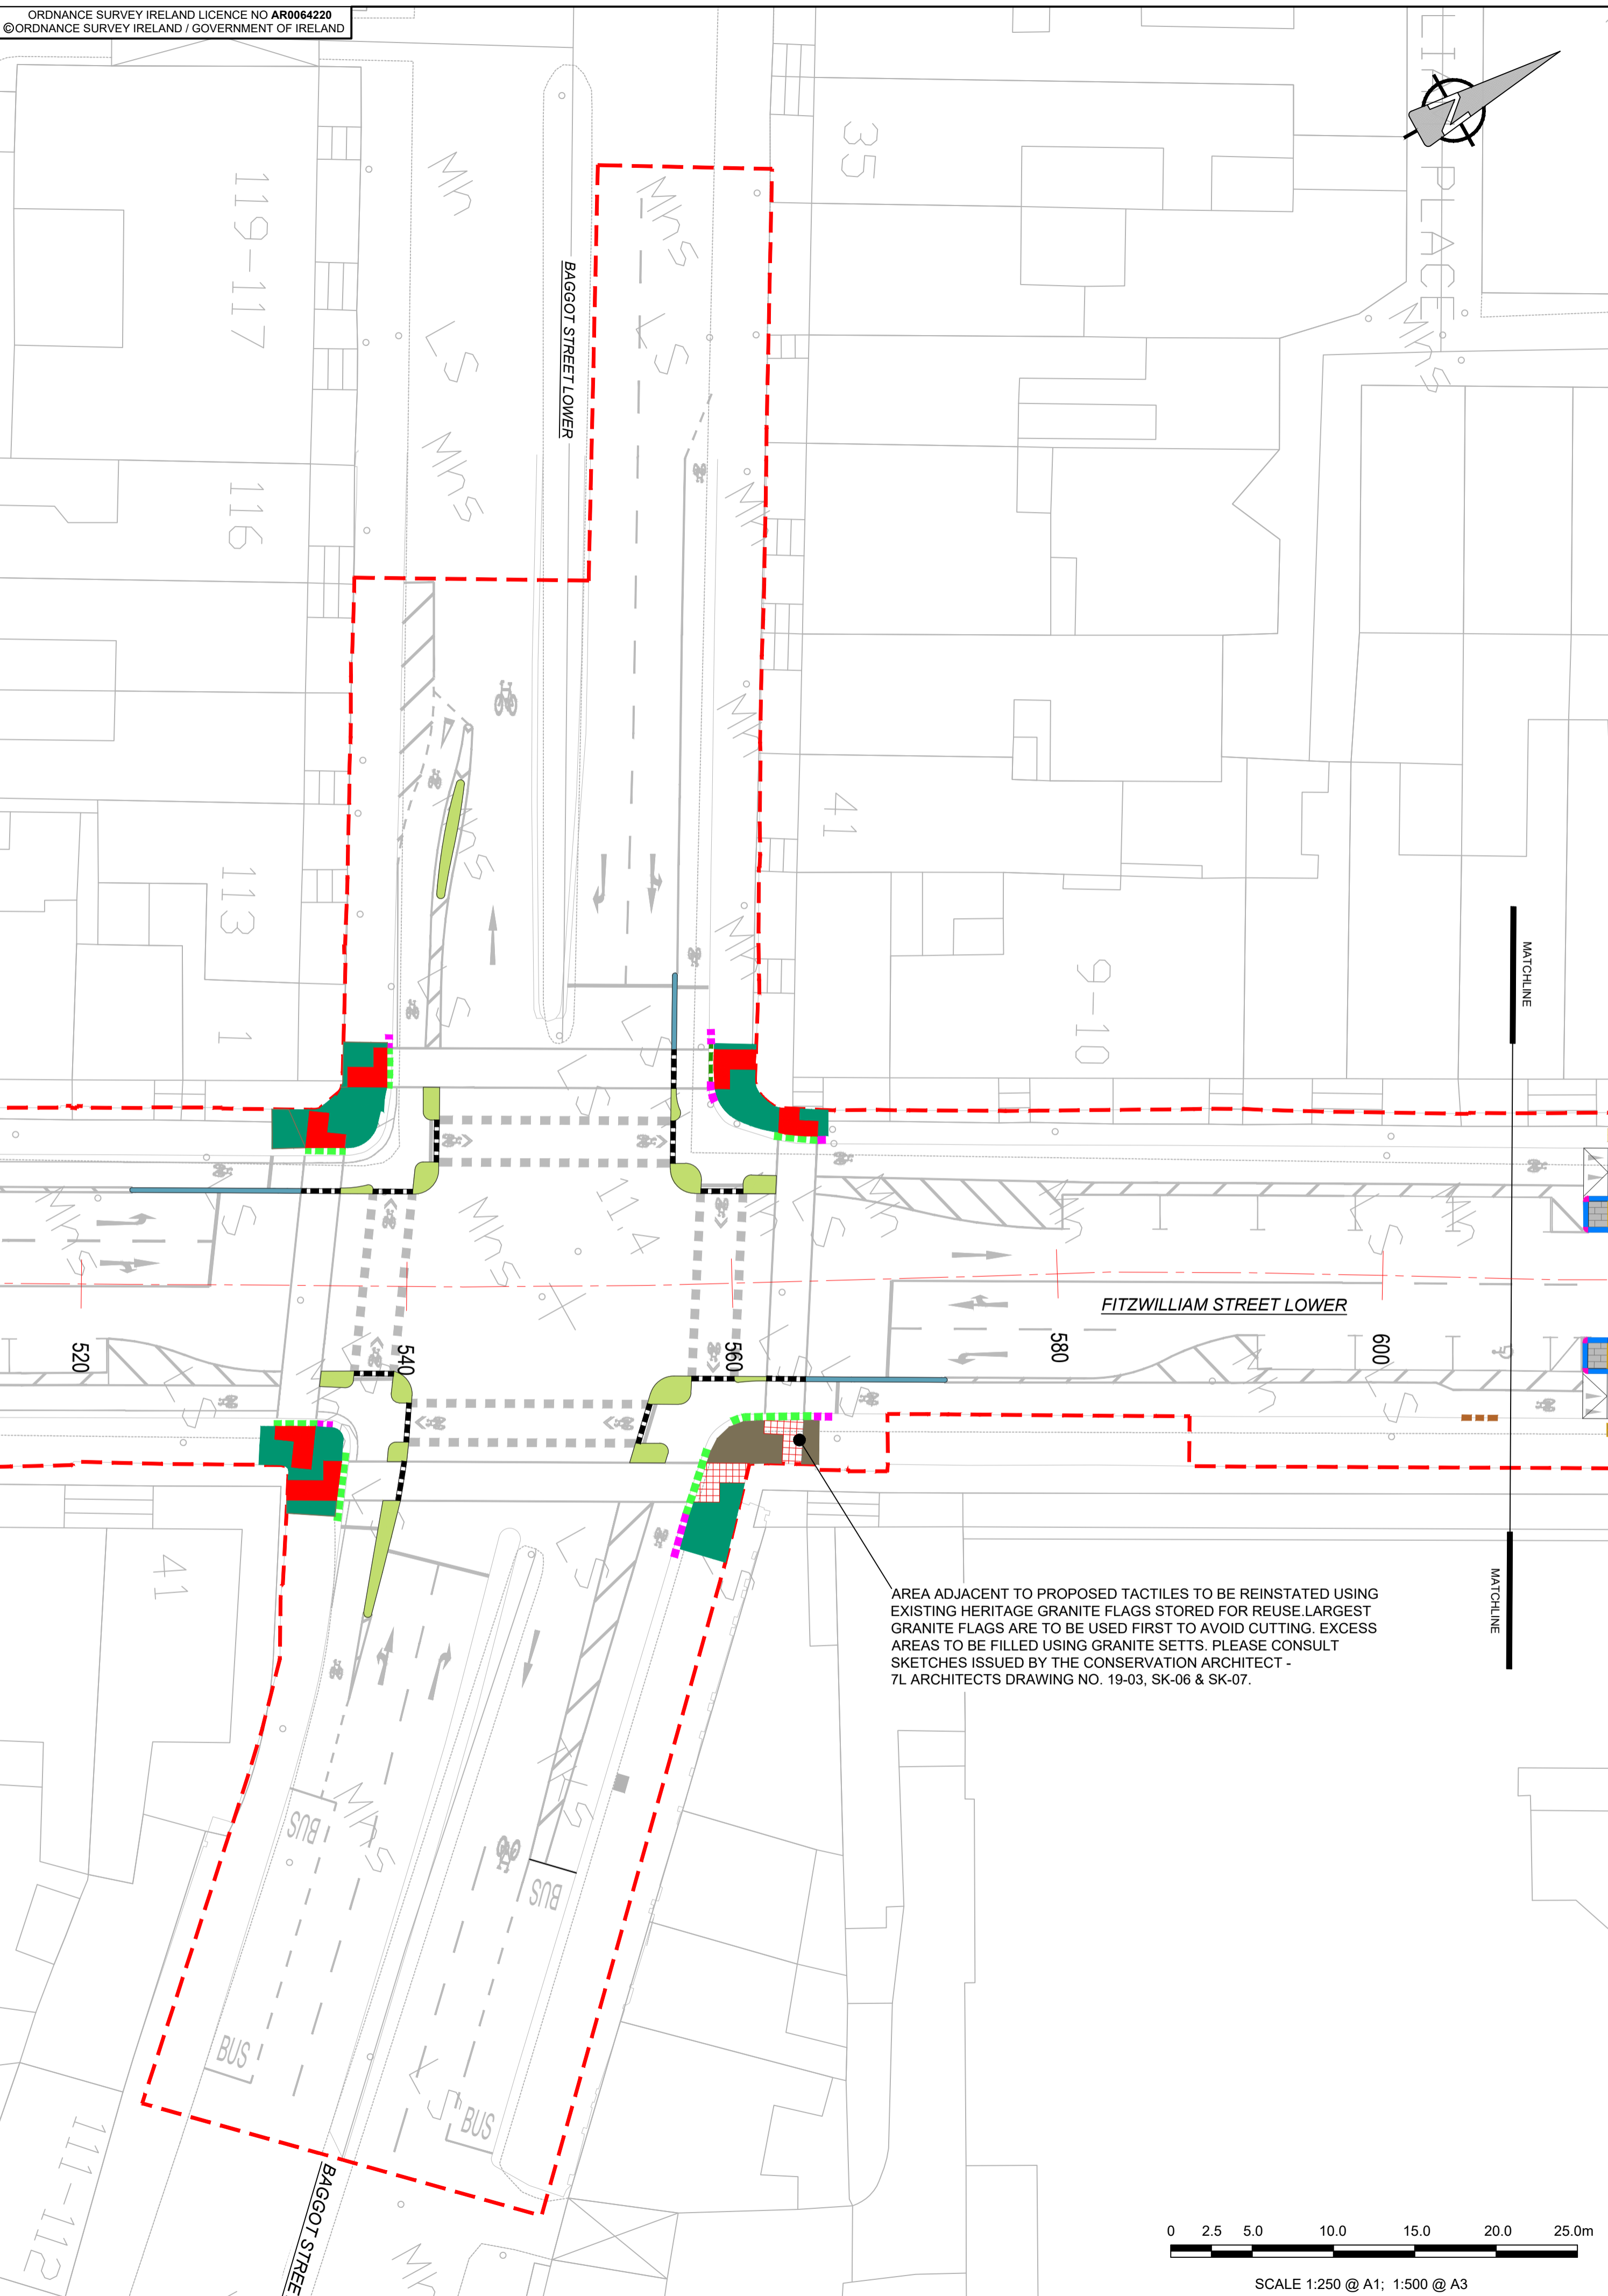

CONSULTANT  
AECOM  
Adelphi Plaza  
George's Street Upper  
Dun Laoghaire Co. Dublin  
Tel: +353(0)1 2383100 Fax: +353(0)1 2383199  
www.aecom.com

- NOTES:
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS. ANY DISCREPANCIES, ERRORS OR OMISSIONS TO BE BROUGHT TO THE ATTENTION OF THE DESIGNER.
  - ALL DIMENSIONS TO BE CHECKED BY THE CONTRACTOR ON SITE PRIOR TO COMMENCEMENT OF WORKS.
  - DO NOT SCALE. ALL MEASUREMENTS AND COORDINATES TO BE CHECKED ON SITE.
  - CONTRACTOR TO REFER TO SPECIFICATION APPENDIX 11/1 FOR ADDITIONAL DETAILS.
  - CONTRACTOR TO UNDERTAKE WORKS TO KERBS, FLAGSTONES AND SETTS IN ACCORDANCE WITH THE CONSTRUCTION STANDARDS FOR ROAD AND STREET WORKS IN DUBLIN CITY COUNCIL.
  - WHERE CHAMBERS ARE LOCATED IN PAVED AREAS, THE PAVING SHOULD BE FINISHED TO WITHIN 5MM OF THE FRAME.


ISSUE/REVISION		
A	JUNE 2022	ISSUED FOR TENDER
I/R	DATE	DESCRIPTION

KEY PLAN

PROJECT NUMBER  
60578028  
SHEET TITLE  
KERBS, FOOTWAYS AND PAVED AREAS  
SHEET 4 OF 6  
SHEET NUMBER  
60578028\_DD\_SHT\_1100.4

**A KERBS, FOOTWAYS AND PAVED AREAS**

1100.4 Scale: 1:250

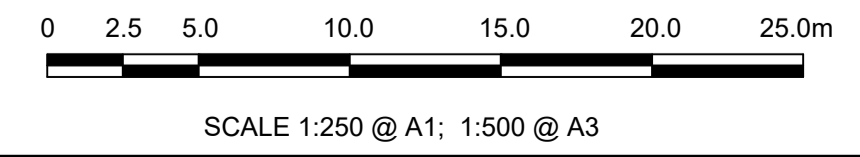

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability, whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. All measurements must be obtained from the stated dimensions.